



# Samsung Galaxy Pocket Neo S5310 LCD Display, Touch screen Replacement

Samsung Galaxy Pocket Neo S5310 LCD Display, Touch screen Glass Replacement

Written By: ZFix



## INTRODUCTION

How to disassemble the phone and change broken Digitizer / Glass or LCD Display.

\_\_\_\_\_ **Vedeo manual:** \_\_\_\_\_

[video: <http://youtu.be/jiiAvS1RDQk>]



---



### TOOLS:

- [Tweezers](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
  - [iFixit Opening Picks set of 6](#) (1)
  - [Tesa 61395 Tape](#) (1)
-

## Step 1 — Loudspeaker

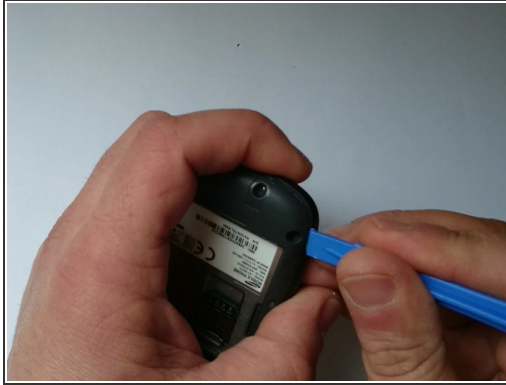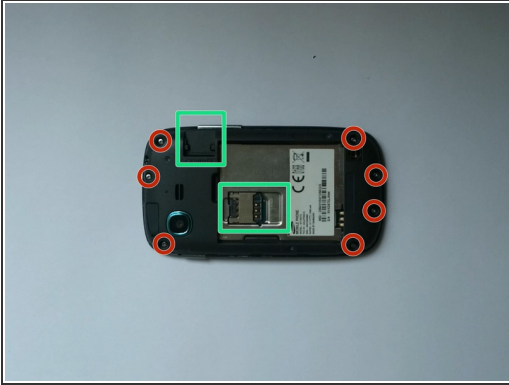




- Remove any SIM and SD card.
- Remove 7x Phillips screws.
- Use a plastic tool to disassemble the rear housing.

## Step 2





- The Loudspeaker is located on the rear housing..

### Step 3 — Logic Board

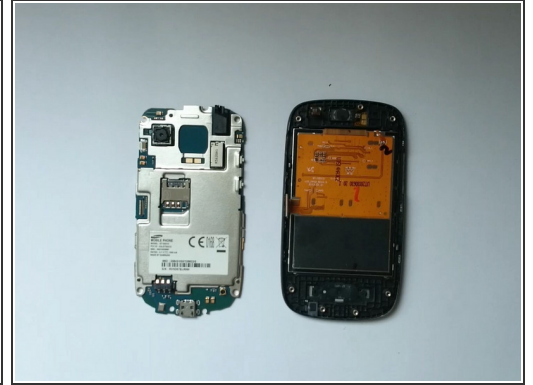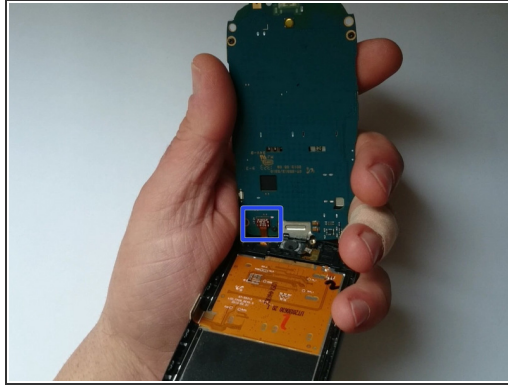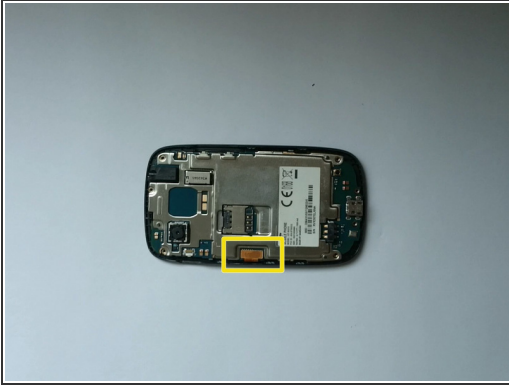

- Disconnect the LCD Display flex cable.
- Lift up the board and disconnect the Touchscreen flex cable.
- Now you can remove the Motherboard.


### Step 4 — Touchscreen, Digitizer Glass, LCD Display

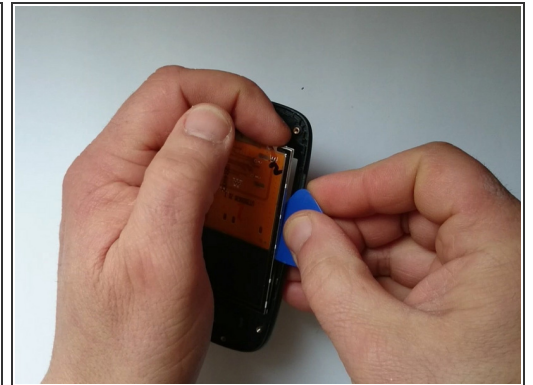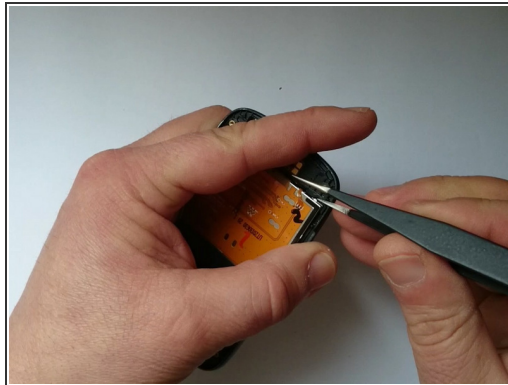

- Warm the touchscreen to make separating the LCD Display more easy
- ⓘ For this manipulation you can use a hair drier.
- In the four corners of LCD display there are small metal plates. Use one of them to lift a little the LCD and put the plastic tool.
- Be careful not to break the display.




## Step 5

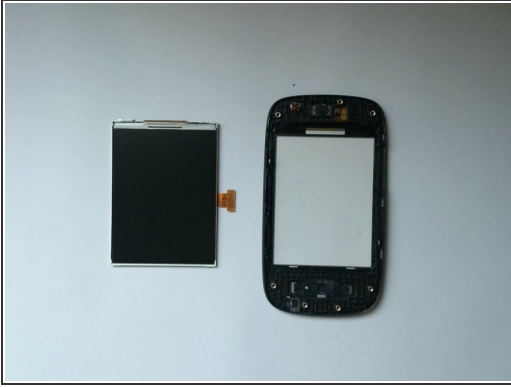

- After separating the LCD Display, again worm the Touchscreen.


⚠ If the glass is broken, put a transparent tape to prevent scattering.

## Step 6

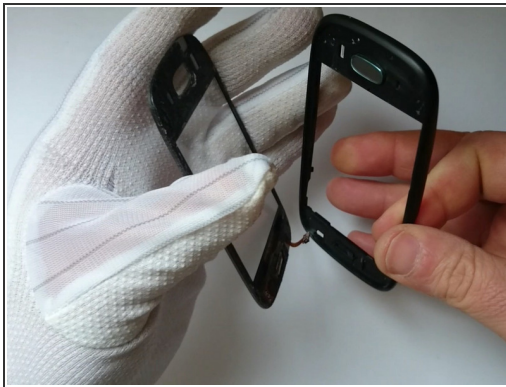


- Use plastic tools and slowly separate the touch screen from the front bezel.

## Step 7

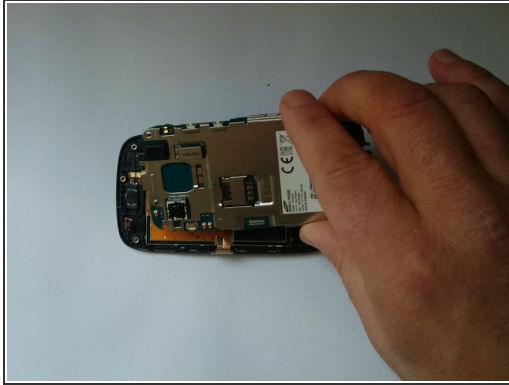

- ❗ If the new spare part has come without adhesive tape. you must put.
  - Reassemble your device, follow these instructions in reverse order.

## Step 8

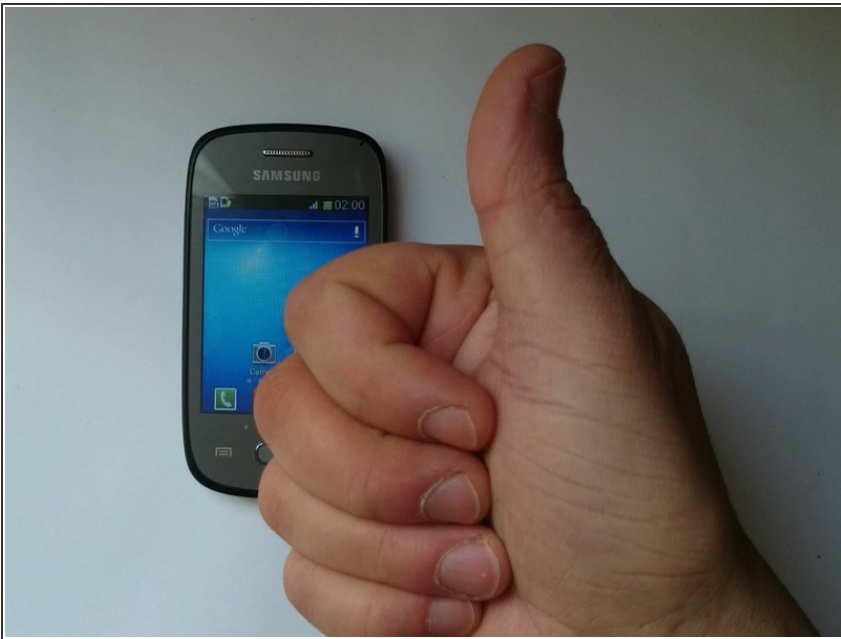

- **Did you do it successfully?**

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 12:19:33 PM.